

# H.265+ 5 MP Full Color Smart IR Bullet IP Camera with Remote Focus and Zoom



## Excellently Efficient Surveillance Video

PLANET ICA-M3580P PoE IP Camera with **dual light** delivers excellent picture quality in **H.264(+)/H.265(+)** 5 mega-pixel resolutions and multi streaming capabilities. Users will benefit from reduced **83%** bandwidth and data storage through more efficient video compression.

Incorporating the **Sony STARVIS back-illuminated CMOS sensor**, **Smart IR illuminators**, and **Warm White LEDs**, which are specially designed for surveillance applications, the ICA-M3580P provides sharp and detailed images under all lighting conditions, offering superior performance in both low-light environments and complete darkness. The combination of Smart IR and Warm White LED illuminators ensures accurate color reproduction and enhanced visibility for comprehensive monitoring. With the 2.7~13.5mm **motorized focus and 5x zoom**, users can remotely adjust the focus and zoom from the web interface. Being able to operate under the temperature range from **-20 to 60 degrees C**, the ICA-M3580P, equipped with a tough IP67-rated metal housing, and its outdoor and handy features, enables you to easily install the camera in any public areas, such as buildings, gardens, parking areas, markets, railway stations and hospitals. It ensures the highest level of reliability for mission-critical applications in any difficult environment.

## Unique Smart IR and Warm White LED

The product brings flexibility and precision to nighttime surveillance with its dual IR and warm white LED support, enabling both Smart IR and Full Color modes. This innovative combination allows the camera to adapt effortlessly to various lighting conditions, delivering clear, detailed images in black and white or vibrant full color, depending on the environment. It is perfect for maintaining top-quality monitoring around the clock.

## Camera


- 1/2.8" 5 megapixel SONY STARVIS Back-illuminated CMOS sensor with Progressive Scan
- 2.7-13.5mm 5X motorized zoom auto focus lens
- Remote smart focus for remote and precise focus adjustment
- 0.003 lux minimum illumination at F1.6
- Built-in smart IR illuminators, effective up to 50 meters
- Built-in 4000K warm white LED, effective up to 40 meters
- Switchable smart IR/warm white LED for Day & Night function

## Video and Audio

- Simultaneous H.264(+)/H.265(+)/JPEG/AVI multi-stream video encoding
- Simultaneous multi-stream support
- H.264 baseline profile, main profile or high profile options
- Max. resolution of 2592 x 1944 at 30fps
- Supports wide dynamic range(WDR), backlight compensation (BLC)
- 3DNR to improve picture quality at low lux
- Two-way audio support
- Image adjustment options
  - AFFocus
  - Image adjustment
  - Exposure settings
  - Day and Night Mode
  - White Balance
  - Video Adjustment
  - Image Enhancement
  - Backlight Settings
- OSD settings
- Smart Event Detection
  - Motion Detection
  - Video Tampering
  - Intrusion Detection
  - Line Cross Detection
  - Loitering Detection
  - People Gathering Detection
  - Enter/Leave Area
- 3 configurable regions of privacy mask to protect personal


### High Efficiency Video Compression

The ICA-M3580P employs the H.264(+)/H.265(+) technology to enable the camera to provide higher and more efficient image compression rates. If the same image quality level of H.264 is compared with that of H.265, the latter is able to save around 83% of bandwidth, meaning H.264(+)/H.265(+) offers much higher quality video for less bandwidth. Thus, it can further enhance the overall performance of its IP surveillance system.

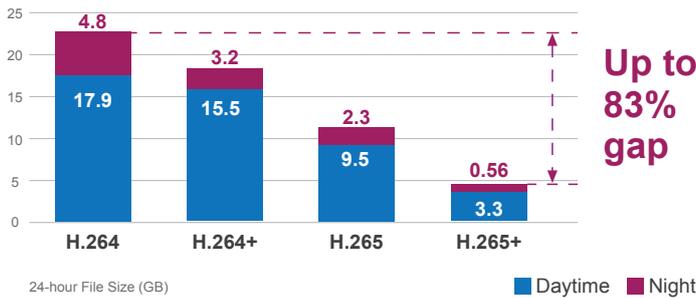

### Smart Focus with Zoom Function

The ICA-M3580P is designed with the Smart Focus to make installation and adjustment easier by allowing remote focus and zoom adjustment. The 5x zoom function works by a stepping motor controlled via software to automatically provide the best iris position for the best exposure time in all lighting conditions.

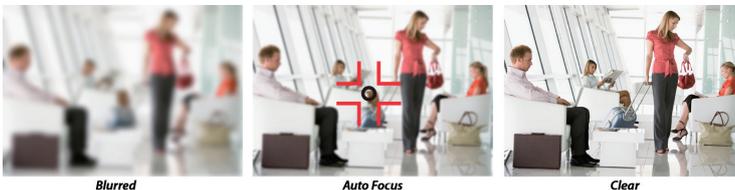

### Exceptional Image Quality

Together with powerful image processing attributes like Wide Dynamic Range (WDR) and 3-dimensional Noise Reduction (3DNR) technology, the ICA-M3580P is able to filter the intense backlight surrounding a subject and remove noises from video signal. The result is that an extremely clear and exquisite picture quality can be produced even under any challenging lighting conditions.



privacy

- ROI (Region of Interest)

### Power over Ethernet

- Compatible with IEEE 802.3af/at Power over Ethernet PD for flexible deployment

### Network Configuration and Management

- PPPoE, IPv4 DHCP Client and IPv4 Static IP Address management
- Supports IPv6
- PLANET DDNS and Easy DDNS, TCP/IP, UDP, PPPoE, HTTPS, ICMP, FTP, SMTP, QoS, 802.1X, P2P, RTP, NTP, Cloud, RTSP, RTCP Encryption and IPEYE available options
- ONVIF compliant for interoperability
- SNTP Network Time Protocol/synchronize with computing time
- Schedule power rebooting
- System log
- User management options for various authorities:
  - Admin
  - Operator
  - Guest
- System maintenance
  - Firmware upload/download via HTTP/HTTPS
  - Configuration upload/download through web interface
  - Hardware-based reset button for resetting to factory default
- Easy configuration and management via Windows-based software or web interface
- PLANET Search Tools utility and Professional Video/Central Management Software
- NDAA Compliant

### Case and Installation

- IP67-rated metal housing with cable management bracket for rigorous environment
- Waterproof and dustproof designs
- -20 to 60 degrees C operating temperature
- Plug and Play installation

### Advanced Media Management

The ICA-M3580P supports a number of advanced features to enhance surveillance flexibility and event management capabilities. The advanced features include **ROI (region of interest)**, **motion detection**, 3 configurable regions of privacy mask to protect personal privacy, **video tampering**, **intrusion detection**, **line cross detection**, **loiter detection**, **people gather detection**, and **vehicle detection** function. It also comes with image adjustment options, newly-added anti-overexposure protection function, three white balance modes, and five backlight compensation modes. The ICA-M3580P also supports SD card interface. You don't need to connect to the NVR to set up the recording. The playback function can be realized by performing it directly.

With more user-friendly GUI interface that allows users to better monitor, the ICA-M3580P supports IPv6, QoS and IEEE 802.1X functions. Newly-added secure email for password reset and email encryption protocol now can support TLS.

### Flexible Installation and Power Functionality


Powered from a PoE power sourcing equipment such as 802.3af/at PoE switch or 802.3af/at PoE injector over a network cable, the ICA-M3580P, adopting the IEEE 802.3af/at standard, does not need extra power cables and manpower, thus reducing installation costs while increasing deployment flexibility and scalability. The ICA-M3580P is ONVIF compliant and interoperable with other brands in the market, making it an indisputably ideal choice for reliable and high-performance surveillance.



### Scheduled Power Rebooting

The ICA-M3580P can be scheduled to reboot at a specified time like every minute, every hour, every week or every month to reduce the chance of crash resulting from buffer overflow.

**Automatically Reboot  
Every Friday 23:00**

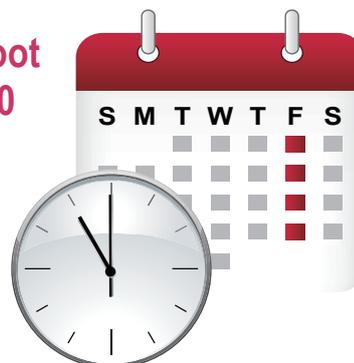


### Remote Access via Mobile App, Web Browser or PVMS

Remote management makes you easy to set the configuration and live viewing via Mobile app, NVR, HDVR, and Web browser. Besides, the ICA-M3580P provides central surveillance management capability with the adoption of its bundled **PLANET Video Management Software**. With the **PVMS**, the ICA-M3580P is expandable for multi-sites management of up to 256-ch IP cameras simultaneously. Users are able to monitor the IP cameras anytime, anywhere.

**Water-resistant and Dust-proof Protection**


The IP67-rated metal housing protects the camera body against rain and dust, and ensures operation under extreme weather conditions, which makes it an ideal solution for outdoor applications, such as buildings, roads, parking areas, garages, railway stations and airports.

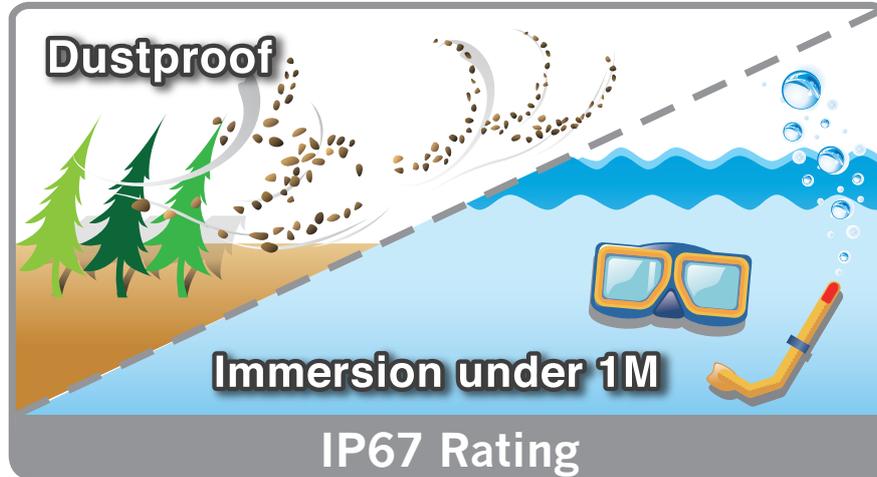

**Applications**

**High Scalability for Various Industrial IP Surveillance Solutions**

PLANET high-resolution ICA-M3580P with dual light can offer various surveillance applications as it can capture clear images and is perfect for identifying objects and persons. Moreover, the ICA-M3580P supports 802.3af/at PoE PD interface, and facilitates the outdoor surveillance applications without worrying the electric source. Besides, Planet PVMS, NVR, HDVR, Web UI and App management make you easy to do the configuration and live viewing. With powerful features offered, the ICA-M3580P no doubt is your best choice for outdoor surveillance solution.

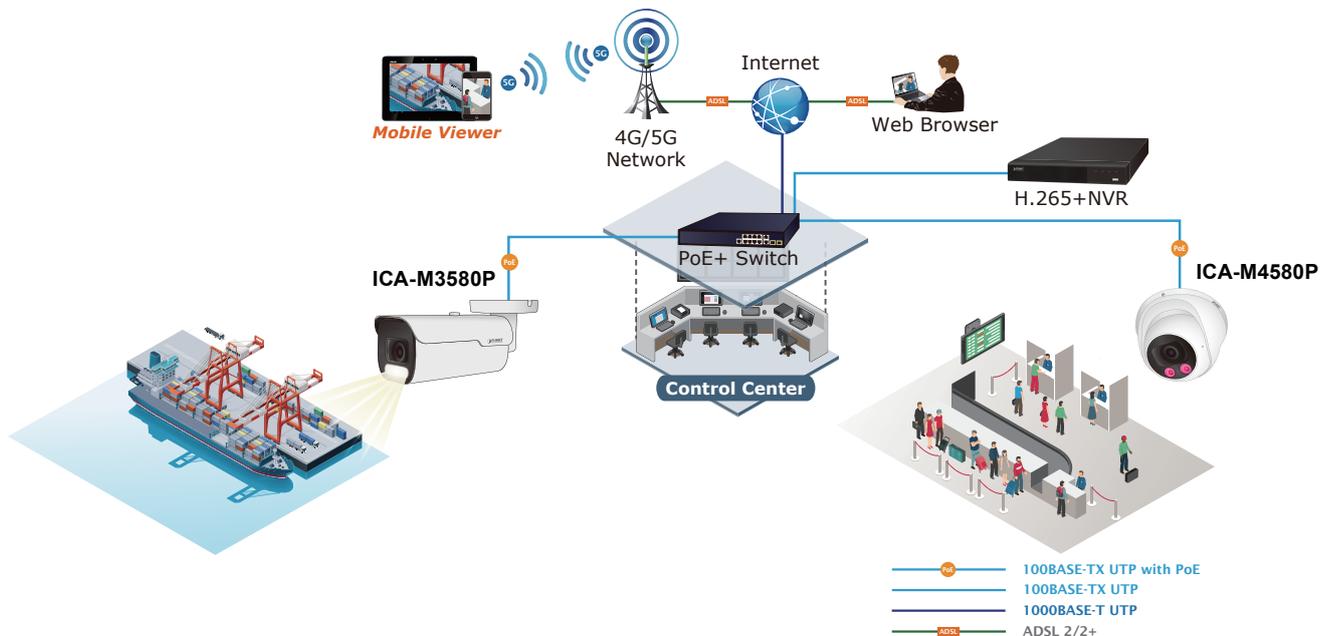

## Specifications

Product	ICA-M3580P		
<b>Camera</b>			
Image Sensor	1/2.8" 5 megapixel SONY STARVIS Back-illuminated Progressive Scan CMOS sensor		
Lens	Focus Length: 2.7-13.5mm Focus Control: Auto Lens Type: Auto Angle of view: Horizontal: 29~103 degrees Vertical: 16~54 degrees		
Min. Illumination	0.003 lux (color) @ F1.6 0lux (B/W) @ IR on		
IR Illuminations	Built-in smart IR illuminators, effective up to 50 meters Built-in 4000K warm white LED, effective up to 40 meters *The IR distance is based on the environment		
Effective Pixels (H x V)	2616 x 1964		
<b>Image</b>			
Video Compression	H.264(+)/H.265(+)/JPEG/AVI		
Video Resolution	Protocol	Main Stream	Sub Stream
	H.264/H.264+	2592 x 1944@30fps	1280 x 720@30fps 720 x 480@30fps
	H.265/H.265+	2560 x 1440@30fps	
	H.265/H.265+	1920 x 1080@30fps	
JPEG	1280 x 720@30fps		
Frame Rate	Up to 30 fps for all resolutions		
Bitrate	32~16384kbps		
Shutter Time	Auto: 1/30-1/1000000Sec		
Image Setting	AFFocus Image adjustment Exposure settings Day and Night Mode White Balance Video Adjustment Image Enhancement Backlight Settings OSD settings Privacy Mask ROI(Region of Interest)		
Streaming	Streaming over UDP, TCP, HTTP, or HTTPS Controllable frame rate Constant and variable bit rate		
<b>Audio</b>			
Audio Input	External audio I/O		
Audio Streaming	Two-way audio		
Audio Compression	G.711A/G.711U/AAC/MP2L2		
<b>Networking &amp; Configuration</b>			
Standards Compliance	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3af/at Power over Ethernet		
Protocol	TCP/IP, IPv4/v6, ICMP, HTTP, HTTPS, FTP, DHCP, PLANET DDNS, Easy DDNS, RTP, RTSP, RTCP, PPPoE, NTP, SMTP, UDP, QoS, 802.1X, P2P, IPEYE, Cloud		
Security	User Management options for various authorities - Admin - Operator - Guest		
Users	On-line monitoring of 16 clients at the same time		
Web Brower	Microsoft IE8-11, Edge, Google Chrome, Firefox		
App	Yes (Android, IOS with P2P QR code)		
Language	Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederlands, Czech, Vietnamese		
<b>System Integration</b>			
Application Programming Interface	ONVIF compliant		

Alarm Triggering	Motion Detection, Privacy Mask, Video Tampering, ROI, Intrusion Detection, Line Cross Detection, Loitering Detection, People Gathering Detection, Enter/Leave Area
Alarm Events	SMTP, FTP, Cloud (Google), Light
<b>Hardware Specification</b>	
Power Requirements	12V DC, 0.95A IEEE 802.3af/at Power over Ethernet
Power Consumption	6.6W (IR on) 7.2W (white LED on)
Dimensions (W x D x H)	268 x 95 x 88 mm
Weight	1.5kg
Reset Button	on the bottom of camera (next to SD slot)
SD Card Slot	Micro SD (1TB maximum)
LED	IR : 38μ x 4pcs, Warm LED : 38μ x 4pcs 4000K
Connector	10/100Mbps Ethernet, waterproof/dustproof RJ45 connector DC power jack RCA audio in/out (white)
Enclosure	IP67 metal case
<b>Power over Ethernet</b>	
PoE Standard	IEEE 802.3af/at PoE PD
<b>Standards Conformance</b>	
Regulatory Compliance	FCC Part 15 Class B, CE
NDAA Compliance	Yes
<b>Environment</b>	
Operating	Temperature: -20 ~ 60 degrees C Relative Humidity: 5 ~ 95% (non-condensing)
Storage	Temperature: -20 ~ 60 degrees C Relative Humidity: 5 ~ 95% (non-condensing)

## Ordering Information

ICA-M3580P	H.265+ 5 MP Full Color Smart IR Bullet IP Camera with Remote Focus and Zoom
------------	---

## Related Products

ICA-3880	H.265+ 8MP Full Color Smart IR Bullet IP Camera
ICA-4880	H.265+ 8MP Full Color Smart IR Dome IP Camera
ICA-4480F	H.265+ 4MP Full Color Dome IP Camera
ICA-M4580P	H.265+ 5 MP Full Color Smart IR Dome IP Camera with Remote Focus and Zoom
HDVR-435	H.265 4-ch 5-in-1 Hybrid Digital Video Recorder
NVR-2500	H.265 25-ch 4K Network Video Recorder
NVR-1600	H.265+ 16-ch 4K Network Video Recorder
NMS-500	Universal Network Management Controller
NMS-1000V	Universal Network Management Controller with LCD Touch Screen (10"/12")

### PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231,  
Taiwan (R.O.C.)  
Tel: 886-2-2219-9518 Fax: 886-2-2219-9528  
Email: sales@planet.com.tw www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2024 PLANET Technology Corp. All rights reserved.

ICA-M3580P